


LH Series Interactive Flat Panel

Leaderhub



Featured Apps

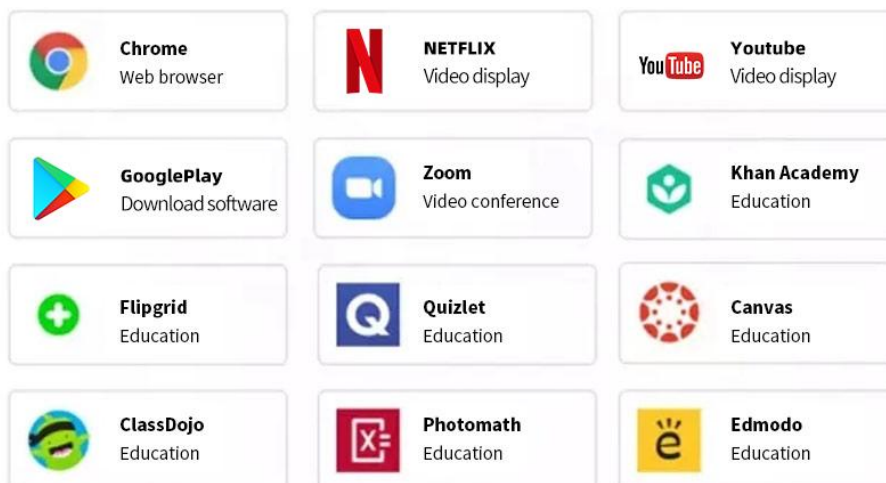

- 0 bonding process, low parallax writing
- Anti-glare tempered glass & high haze OC, display more clearly
- Support hardware anti-blue light, eye protection and healthy display
- 4K UHD display, support full channel 4K UI
- Support onboard full-featured USB Type-C (support 65W charging)
- Support wireless screen transfer function
- $\pm 1\text{mm}$ high-precision infrared touch, 1.5mm low writing height, to achieve more precise writing
- Support Wi-Fi6, dual-band 2.4G/5G, AP+STA working mode

- In standby mode, HDMI/RS232 channel/network signal input intelligent wake-up
- Support One Netcom, Android and OPS are both Gigabit networks
- Support network sharing, connect the external device to the Type-C/TOUCH interface and share the large-screen wired network
- Built-in 48 million wide-angle auto-focus camera, supports Android 4K photo & video
- Built-in 8 array microphones, support intelligent noise reduction, vocal gain, etc.
- Support 2.1 channel, front gap sound + bass back sound
- Audio and video functions: sound source localization, Auto Framing

Product Specification		
Display	Display	75 inches D-LED backlight
	Response time	8ms
	Aspect ratio	16:9
	Resolution	3840 X 2160
	Refreshing frequency	60Hz
	NTSC	72%
	Dynamic contrast ratio	5000:1
	Viewing angle	Horizontal 178°/Vertical 178°
	Brightness with glass	350cd/m ²
	Life time	≥30000 hours
Operating System	Operating system	Android 11.0 & Windows 10 (OPS optional)
	Chipest	A311D2
	CPU	A73*4+A53*4
	GPU	Mail G52*8
	RAM	8G DDR
	Storage	128G EMMC

Touch System	Sensing type	Infrared touch
	Touch tool	Passive infrared pen
	Touch points	20 point touch
	Touch response time	≤5 ms
Audio	Soud channel	2.1
	Speaker	2*10W+15W
Microphone	Quantity	8
	Speaker	0~8m
Camera	Quantity	1
	Pixel	48MP
	Position	Bulit-in the middle of top frame
Power	Power requirements	100-240V~50/60Hz
	Overall power	450W
	Standby power	≤0.5W
I/O port	HDMI IN	3
	HDMI OUT	1
	USB Type-C IN	1
	RJ45 IN	1
	USB 2.0	1
	USB 3.0	4
	TOUCH 2.0	1
	RJ45 OUT	1

	SPDIF	1
	RS232	1
	AUDIO OUT	1
Machine parameters	Product size (cm)	170.9(L) X 102.9(H) X 8.8(T) cm
	Outer box size (cm)	186.3(L) X 114.8(H) X 22.5(T) cm
	Whole machine+bracket thickness	11.8cm
	VESA bracket standard(cm)	80cm (H) X 40cm (V)
	Product weight	Net weight: 53.75kg / gross weight: 69.35kg
	Operation temperature	0~40°C
	Storage temperature	-20~60°C
	Accessories	1. Power cord *1 2. Write pen*2 3. Wall-mounted *1

Stand Accessories



AC power cord
(optional)



Wall bracket
(optional)



Write Pen

Optional Accessories



Floor stand




Wireless Projector



OPC/PC Module
(only for dual system)


75 Inch Dimension

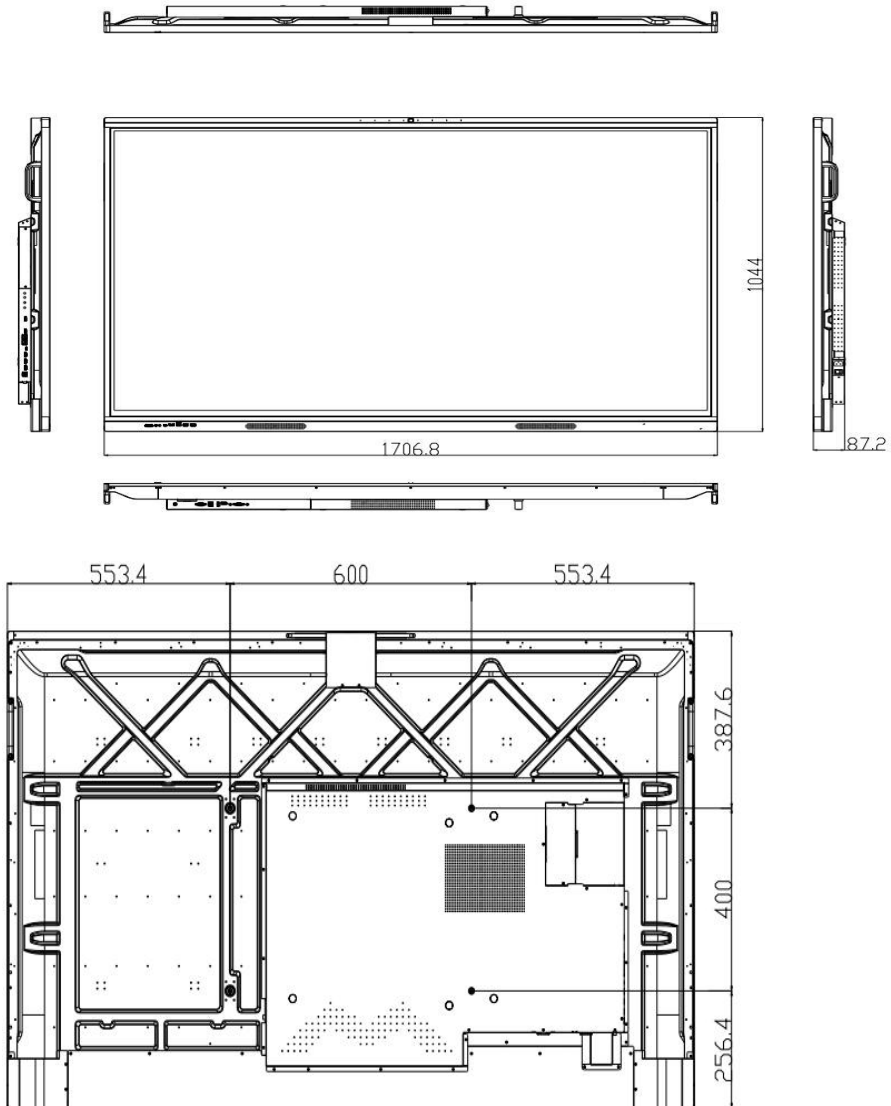

Details



Installation

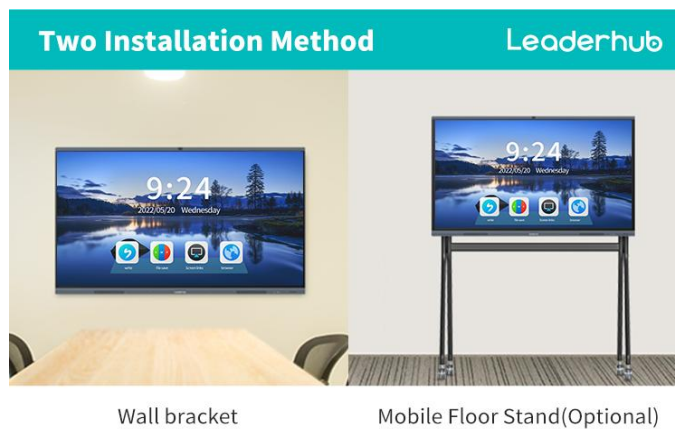

Standard Accessories



AC power cord



Wall bracket



Write pen

Optional Items



OPS




Floor stand



Wireless projector

PC Module(Optional)

	Picture	
OPS	CPU	I3/I5/I7(Optional)
	RAM	8G/16G/32G(optional)
	Storage	128G/256G/512G SSD(optional)
	Main feature	The front-facing DP+HDMI display port and the rear HDMI perfectly support 4K60HZ. Six USB ports in front, multiple application ports.
	USB	6 (3*USB2.0+3*USB3.0)
	LAN	1
	MIC-IN	1
	Audio-Out	1
	HDMI	1

Application



Brainstorming



Video Conference



Community Hospital



Childhood Teaching



Training Institutions



Share Demo