

## LH Series Interactive Flat Panel



### Featured Apps



- 0 bonding process, low parallax writing
- Anti-glare tempered glass & high haze OC, display more clearly
- Support hardware anti-blue light, eye protection and healthy display
- 4K UHD display, support full channel 4K UI
- Support onboard full-featured USB Type-C (support 65W charging)
- Support wireless screen transfer function
- $\pm 1\text{mm}$  high-precision infrared touch, 1.5mm low writing height, to achieve more precise writing
- Support Wi-Fi6, dual-band 2.4G/5G, AP+STA working mode
- In standby mode, HDMI/RS232 channel/network signal input intelligent wake-up
- Support One Netcom, Android and OPS are both Gigabit networks
- Support network sharing, connect the external device to the Type-C/TOUCH interface and share the large-screen wired network
- Built-in 48 million wide-angle auto-focus camera, supports Android 4K photo & video
- Built-in 8 array microphones, support intelligent noise reduction, vocal gain, etc.
- Support 2.1 channel, front gap sound + bass back sound
- Audio and video functions: sound source localization, Auto Framing



## Product Specification

Display	Display	65 inches D-LED backlight
	Response time	8ms
	Aspect ratio	16:9
	Resolution	3840 X 2160
	Refreshing frequency	60Hz
	NTSC	72%
	Dynamic contrast ratio	5000:1
	Viewing angle	Horizontal 178°/Vertical 178°
	Brightness with glass	370cd/m <sup>2</sup>
	Life time	≥30000 hours
Operating System	Operating system	Android 11.0 & Windows 10 (OPS optional)
	Chipest	A311D2
	CPU	A73*4+A53*4
	GPU	Mail G52*8
	RAM	8G DDR
	Storage	128G EMMC
Touch System	Sensing type	Infrared touch
	Touch tool	Passive infrared pen
	Touch points	20 point touch
	Touch response time	≤5 ms

Audio	Soud channel	2.1
	Speaker	2*10W+15W
Microphone	Quantity	8
	Speaker	0~8m
Camera	Quantity	1
	Pixel	48MP
	Position	Bulit-in the middle of top frame
Power	Power requirements	100-240V~50/60Hz
	Overall power	450W
	Standby power	≤0.5W
I/O port	HDMI IN	3
	HDMI OUT	1
	USB Type-C	2
	RJ45 IN	1
	USB 2.0	1
	USB 3.0	4
	TOUCH 2.0	3
	RJ45	2
	COAX	1
	RS232	1
	AUDIO IN	1
	VGA	1

	DP	1
	AUDIO OUT	1
Machine parameters	Product size (mm)	1488(L) X 906(H) X 87(T)
	Outer box size (mm)	1628(L) X 208(H) X 1014(T)
	VESA standard(mm)	600mm (H) X 400mm (V)
	Product weight	Net weight: 36.85kg / gross weight: 45.4kg
	Operation temperature	0~40°C
	Storage temperature	-20~60°C
	Accessories	
		2. Write pen*2
		3. Wall-mounted *1


## 65 Inch Dimension

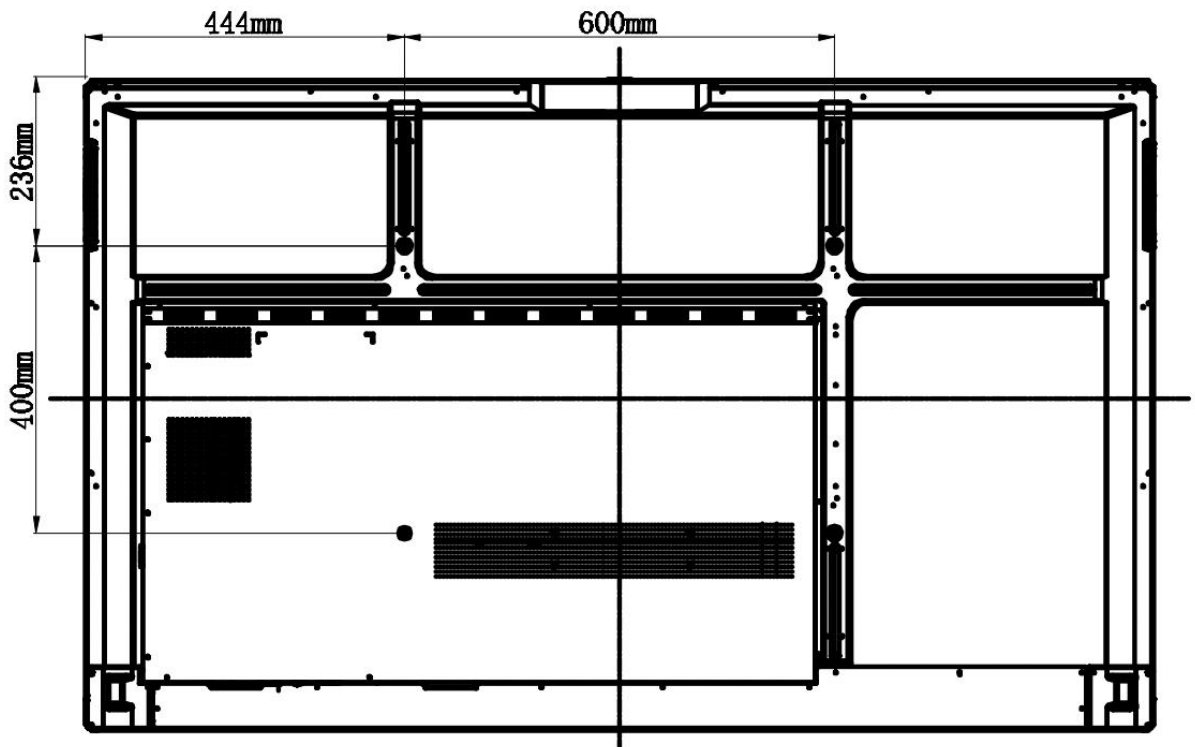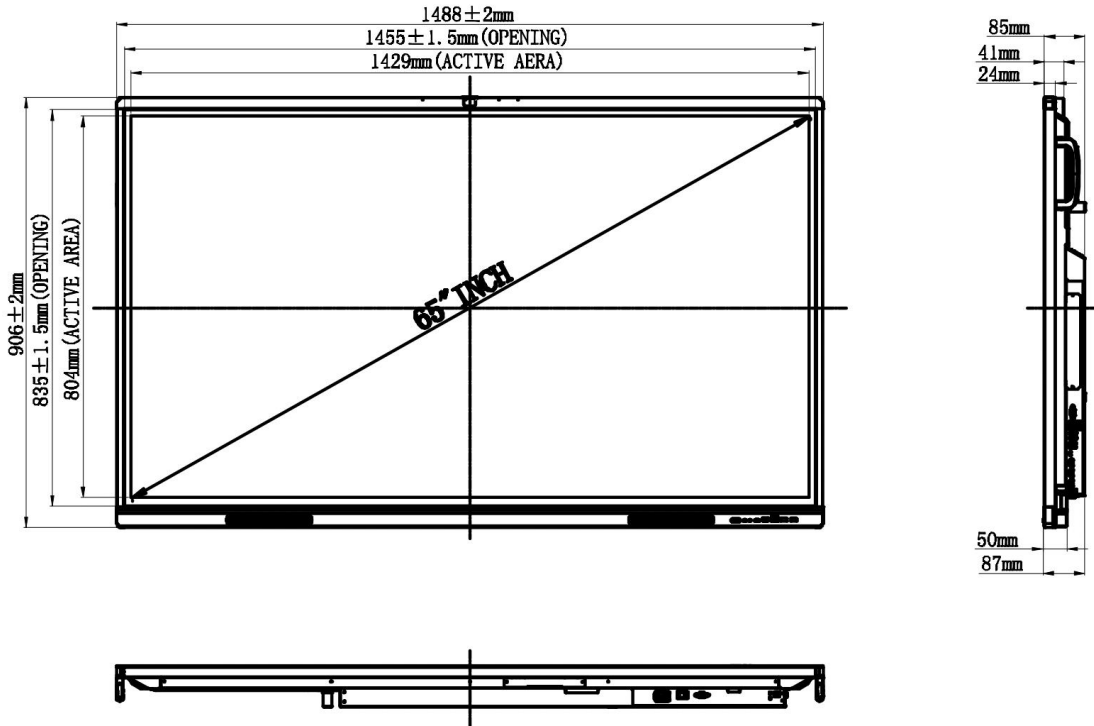

Details



## Installation

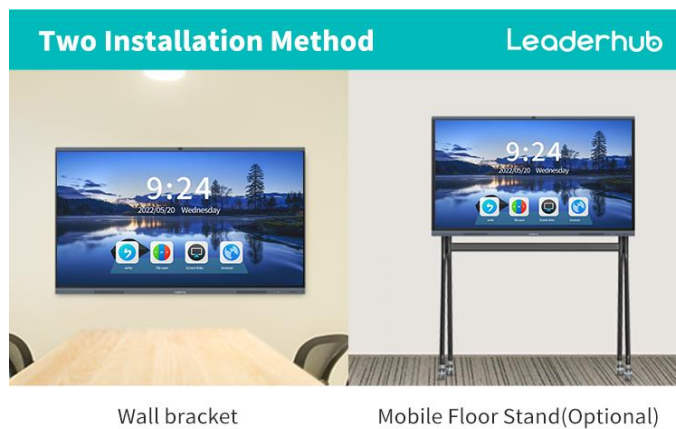

## Standard Accessories



AC power cord



Wall bracket



Write pen

## Optional Items



OPS




Floor stand



Wireless projector

## PC Module(Optional)

OPS	Picture	
	CPU	I3/I5/I7(Optional)
	RAM	8G/16G/32G(optional)
	Storage	128G/256G/512G SSD(optional)
	Main feature	The front-facing DP+HDMI display port and the rear HDMI perfectly support 4K60HZ. Six USB ports in front, multiple application ports.
	USB	6 (3*USB2.0+3*USB3.0)
	LAN	1
	MIC-IN	1
	Audio-Out	1
HDMI	1	

## Application



Brainstorming



Video Conference



Community Hospital



Childhood Teaching



Training Institutions



Share Demo